

CHAPMAN AND HALL

Published under the authority of the
Royal Aeronautical Society

AIRCRAFT HYDRAULICS

edited by **H. G. CONWAY**

Volume I—Hydraulic Systems

Size 10 in. x 6 in. 146 pages 107 illustrations
35s. net

Volume II—Component Design

Size 10 in. x 6 in. 216 pages 120 illustrations
45s. net

INSTRUMENTATION IN TESTING AIRCRAFT

by **C. N. JAQUES**

Size $8\frac{3}{4}$ in. x $5\frac{1}{2}$ in. 292 pages 117 illustrations
45s. net

LANDING GEAR DESIGN

by **H. G. CONWAY**

Size 10 in. x 6 in. 342 pages 366 illustrations
56s. net

AIRCRAFT ELECTRICAL ENGINEERING


edited by **G. G. WAKEFIELD**

Size 10 in. x 6 in. 350 pages 201 illustrations
50s. net

37 ESSEX STREET - LONDON WC2



FOR V/STOL AIRCRAFT

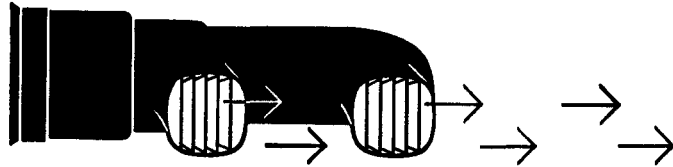

Bristol Siddeley lift/thrust turbofans are the optimum power units for all V/STOL applications, because the total thrust can be used for both lift and forward propulsion. They permit the simplicity of a single-engine installation or, used with separate lift engines, they provide a simpler and more economical solution than can be achieved with any combination of separate lifting and propulsion engines.

SINGLE-ENGINE INSTALLATION

- * Simplified installation.
- * Simplified aircraft control.
- * The resultant thrust and intake drag passes through a fixed point near the aircraft centre of gravity.
- * Maintenance and spares requirements are confined to one engine.
- * Availability of a large power reserve for acceleration and manoeuvre.

MULTI-ENGINE INSTALLATION

- * Fewer specialised lift engines required as the total propulsive power is also available for take-off.

SIMPLIFIED POWER

SUPERSONIC FLIGHT


In Bristol Siddeley lift/thrust turbofans fuel can be burned in the by-pass ducting or plenum chamber to give a thrust boost for take-off and supersonic flight. This plenum chamber burning permits:

- * A large thrust boost for supersonic speeds with only a modest increase in specific fuel consumption.
- * Engine performance matched to aircraft cruise requirements.
- * Greater thrust for transonic acceleration.
- * Greater radius of operation.

These thrust boost advantages are achieved more economically by plenum chamber burning than by reheat in the hot exhaust gases.

The development of Bristol Siddeley lift/thrust engines is supported by the US Government through the Mutual Weapons Development Programme.

For further information, please write to: The Sales Manager, Aero-engine Division, Bristol Siddeley Engines Limited, PO Box 3, Filton, Bristol, England.

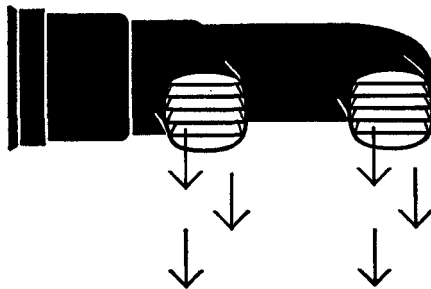

BRISTOL SIDDELEY ENGINES LIMITED

THE AERONAUTICAL QUARTERLY

It is the aim of *The Aeronautical Quarterly* to attract not only original papers contributing to aeronautical science and engineering, and papers developing new or improved methods of analysis and experimental techniques, but also papers on allied sciences which have a bearing on aeronautical problems. *The Aeronautical Quarterly* is open to authors of any nationality and is not restricted to members of the Society. Most papers can be published within nine months of receipt. Short papers, of not more than 2,000 words, are published much more quickly.

VOLUME XIII

Volume XIII of *The Aeronautical Quarterly* will be published in February, May, August and November 1962.

The price of *The Aeronautical Quarterly* has remained unchanged since 1953, but it has now been found necessary, because of increases in printing and general costs, to make a slight increase in price. The new prices, which take effect from Volume XIII, are, *including postage and packing*:—

	<i>To Members of the Society</i>			<i>To Non-Members</i>		
	£	s.	d.	£	s.	d.
Per Part		9	0		18	0
			(\$1.50)			(\$2.60)
Subscription (4 parts)	1	16	0	3	12	0
			(\$5.50)			(\$10.30)

Papers to be published in future issues include:—

- I. M. Allison*—The Elastic Stress Concentration Factors in Shouldered Shafts. Part III.
- I. T. Cook and K. C. Rokey*—Shear Buckling of Clamped and Simply-Supported Infinitely Long Plates Reinforced by Transverse Stiffeners and a Central Longitudinal Stiffener.
- D. S. Dosanjh, E. P. Gasperek and S. Eskinazi*—Decay of a Viscous Trailing Vortex.
- R. H. Gallagher and I. Rattinger*—The Deformational Behaviour of Low Aspect Ratio Multi-Web Wings. Part III.
- T. H. Lambert and R. J. Brailey*—The Use of an Interference Fit Bush to Improve the Fatigue Life of a Pin-Jointed Connection.
- J. M. T. Thompson*—The Elastic Instability of a Complete Spherical Shell.
- W. H. Wittrick*—Stress Concentrations for a Family of Reinforced Square Holes with Rounded Corners.
- B. A. Woods*—The Flow Close to the Surface of a Circular Cone at Incidence to a Supersonic Stream.

PRINTED BY THE LEWES PRESS WIGHTMAN & CO. LTD., LEWES, SUSSEX, ENGLAND, AND PUBLISHED BY THE ROYAL AERONAUTICAL SOCIETY, 4 HAMILTON PLACE, LONDON W.1, ENGLAND.